

107509168

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
2 October 2003 (02.10.2003)

PCT

(10) International Publication Number
WO 03/080396 A1(51) International Patent Classification⁷: B60R 11/02

(21) International Application Number: PCT/NL03/00224

(22) International Filing Date: 25 March 2003 (25.03.2003)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1020262 27 March 2002 (27.03.2002) NL

(71) Applicant (for all designated States except US): WILDE, DE, Bouwe, Guustaaf, Dirk [NL/NL]; P.O.Box 132, NL-2160 AC Lisse (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WILDE, DE, Jim, Sven, Anthony [NL/NL]; P.O.Box 132, NL-2160 AC Lisse (NL). WILDE, DE, Tom, Marnix, Alexander [NL/NL]; P.O.Box 132, NL-2160 AC Lisse (NL).

(74) Agent: VERNOUT, Robert; Sweelinckplein 1, NL-2517 GK The Hague (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE (utility model), DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MODULAR ELECTRONIC DEVICE

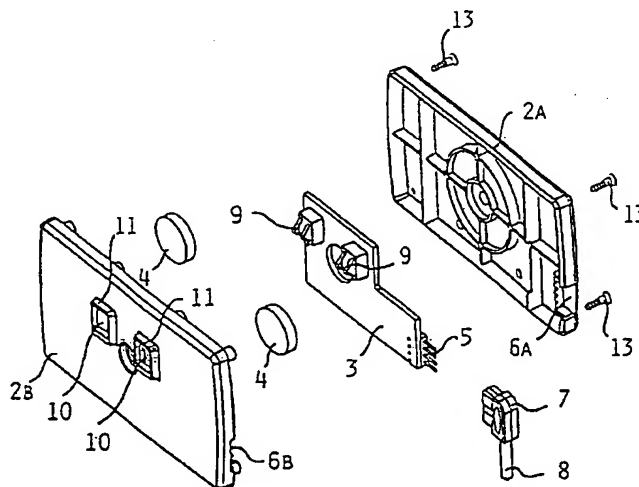

(57) Abstract: A modular electronic device, for example a car radio, a navigation system or a radar detection system, comprising a fixed module fitted with external electrical contact elements, which is to be mounted on a wall, for example a dashboard, and a detachable module fitted with electronic components and external electrical contact elements, which detachable module can be connected to the fixed module in such a manner that the external electrical contact elements of the two modules are interconnected, wherein the fixed module and/or the detachable module comprise(s) at least one magnet, such that the detachable module can be connected to the fixed module through magnetic force.

BEST AVAILABLE COPY

WO 03/080396 A1

MODULAR ELECTRONIC DEVICE

- 5 The invention relates to a modular electronic device, for example a car radio, a navigation system or a radar detection system, comprising a fixed module fitted with external electrical contact elements, which is to be mounted on a wall, for example a dashboard, and a detachable module fitted
- 10 with electronic components and external electrical contact elements, which detachable module can be connected to the fixed module in such a manner that the external electrical contact elements of the two modules are interconnected.
- 15 Such a device is known. Especially in the case of car radios this modular structure is frequently used, the advantage being the fact that the car radio does not work without the detachable module (the front panel), which makes it less interesting for thieves if the user takes the front panel
- 20 with him upon leaving the car. An important aspect of such modular systems is the electrical connection between the two modules, which must be reliable in spite of the fact that one module is detachable. One drawback of the existing device, in which the connection between the two modules is effected and
- 25 locked by mechanical means, is the fact that a relatively large force must be exerted on the detachable module, or that it takes a relatively complex operation to disconnect said module.
- 30 The object of the invention is to provide an inexpensive and efficient modular electronic device, in which the detachable module is easy to connect and disconnect, and in which furthermore a reliable mechanical and electrical connection

between the two modules is effected.

In order to accomplish that objective, the fixed module and/or the detachable module comprise(s) at least one magnet, such that the detachable module can be connected to the fixed module through magnetic force. It has become apparent that this makes it very easy to connect the detachable module, in which the detachable module only needs to be held near the fixed module, whereupon the magnetic attraction will provide a sufficiently firm connection between the two modules. The detachable module can be detached in a simple manner by pulling at said module, with no mechanical unlocking being required.

Preferably, the fixed module comprises the magnet, and the detachable module comprises a metal element that can be attracted by the magnet. Since magnets are relatively heavy, it is preferable to accommodate it in the fixed module, so that the user does not have to carry it along.

Preferably, the detachable module comprises a display screen, and furthermore preferably it comprises inputting keys for operating the device.

Preferably, the fixed module and the detachable module comprise mating guide surfaces, which guide the detachable module to the correct position upon connection thereof to the fixed module. This excludes the risk of incorrect positioning of the two modules with respect to each other upon connection, which is in particular important with a view to obtaining a correct connection between the electrical contact elements. The guide surfaces may be made up of a

substantially frusto-conical or frusto-pyramidal projection in one module and a corresponding substantially frusto-conical or frusto-pyramidal recess in the other module, for example, in which case the projection is inserted into the
5 recess upon connection.

Preferably, the external electrical contact elements of the fixed module and/or the detachable module are positioned in such a manner that they will automatically come into contact
10 with each other upon connection. What is meant by this is that the electrical contact does not need to be effected by means of a separate operation. Preferably, the external electrical contact elements of the fixed module are elastic, to such an extent that they are elastically deformed upon
15 connection. As a result, a reliable electrical connection will be maintained.

Preferably, the device furthermore comprises a main module, which contains the majority of the functional components of
20 the device, in which the fixed module mainly functions as a holder for the detachable module to be connected thereto, and in which the fixed module is electronically connected to the main module. This makes it possible to mount the main module, which may represent the major part of the value of the
25 device, in a safe, locked place, for example the boot of a car.

Preferably, the detachable module is provided with additional external contact elements, which can be directly connected to
30 the main module by means of an electrical cable. This makes it possible to detach the detachable module, which serves as the operating element, from the fixed module, so that back

seat passengers of the car can operate the device, for example, and watch the display screen, for example.

The invention will now be explained in more detail by means
5 of an embodiment as shown in the Figures, in which:

Figure 1 is an exploded view of the fixed module of a modular electronic device;

10 Figure 2 is a perspective view of the fixed module as shown in Figure 1; and

Figure 2 is a perspective view of the fixed module as shown in Figure 1 and of a detachable module of the modular
15 electronic device in connected condition.

Figure 1 shows the individual parts of a fixed module 1 of a modular electronic device, such as a GPS navigation system. The detachable module 1 comprises a housing consisting of a
20 rear housing part 2a and a front housing part 2b, a contact plate 3, and two disc-shaped magnets 4. The contact plate 3 comprises contact fingers 5 on one side, which, in combination with a recess 6a, 6b in the housing, form a contact into which a plug 7 can be inserted. A cable 8
25 connects the plug 7 to a main module (not shown), in which the other parts of the navigation system are accommodated.

Springing contact elements 9 are mounted on the contact plate 3, which contact elements extend through holes 10 formed in
30 the front housing part 2b for that purpose. Frusto-pyramidal projections 11, i.e. projections 11 whose circumferential walls 12 are pyramidal in part, are arranged on the front

side of the housing 1, around the holes 10. Said circumferential walls 12 form guide surfaces which ensure that the detachable module 14 is correctly positioned, to which end the rear wall (not shown) of said detachable module is provided with correspondingly shaped recesses, into which the projections 11 are inserted upon connection of said module. The housing parts 2a, 2b are fixed together by means of screws 13, thereby enclosing the contact plate 3 and the magnets 4.

10

The rear wall of the detachable module 14 is made of a metal, on which the magnets 4 exert a force of attraction sufficiently large for pulling the detachable module 14 firmly into contact with the fixed module 1. Furthermore, said rear wall is provided with metal contact elements (not shown) in the aforesaid frusto-pyramidal recesses, against which the springing contact elements 9 can abut. The contact elements enable the transfer of data and current between the main module and the detachable module 1, which is furthermore provided with a display screen 15 for displaying information and with inputting keys 16 for operating the navigation device. The detachable module 13 is furthermore provided with an additional contact 16, into which the plug 7 can be inserted. In this way it is possible to disconnect the module 13 from the fixed module 1 and operate the navigation device, for example from the back seat of the car.

CLAIMS

1. A modular electronic device, for example a car radio, a navigation system or a radar detection system,
5 comprising a fixed module (1) fitted with external electrical contact elements (9), which is to be mounted on a wall, for example a dashboard, and a detachable module (13) fitted with electronic components and external electrical contact elements, which detachable
10 module (13) can be connected to the fixed module (1) in such a manner that the external electrical contact elements of the two modules (1, 13) are interconnected, characterized in that the fixed module (1) and/or the detachable module (13) comprise(s) at least one magnet
15 (4), such that the detachable module (13) can be connected to the fixed module (1) through magnetic force.
2. A device according to claim 1, characterized in that the
20 fixed module (1) comprises the magnet (4), and the detachable module (13) comprises a metal element that can be attracted by the magnet (4).
3. A device according to claim 1 or 2, characterized in
25 that the detachable module (13) comprises a display screen (14).
4. A device according to claim 1, 2 or 3, characterized in
30 that the detachable module (13) comprises inputting keys for operating the device.
5. A device according to any one of the preceding claims,

characterized in that the fixed module (1) and the detachable module (13) comprise mating guide surfaces, which guide the detachable module (13) to the correct position upon connection thereof to the fixed module (1).

5

6. A device according to any one of the preceding claims, characterized in that the external electrical contact elements (9) of the fixed module (1) and/or the detachable module are positioned in such a manner that they will automatically come into contact with each other upon connection.

10

7. A device according to any one of the preceding claims, characterized in that the external electrical contact elements (9) of the fixed module (1) are elastic, to such an extent that they are elastically deformed upon connection.

15

8. A device according to any one of the preceding claims, characterized in that the device furthermore comprises a main module, which contains the majority of the functional components of the device, wherein the fixed module (1) mainly functions as a holder for the detachable module (13) to be connected thereto, and wherein the fixed module (1) is electronically connected to the main module.

20

25

9. A device according to claim 8, characterized in that the detachable module (13) is provided with additional external contact elements (16), which can be directly connected to the main module by means of an electrical

30

cable (8).

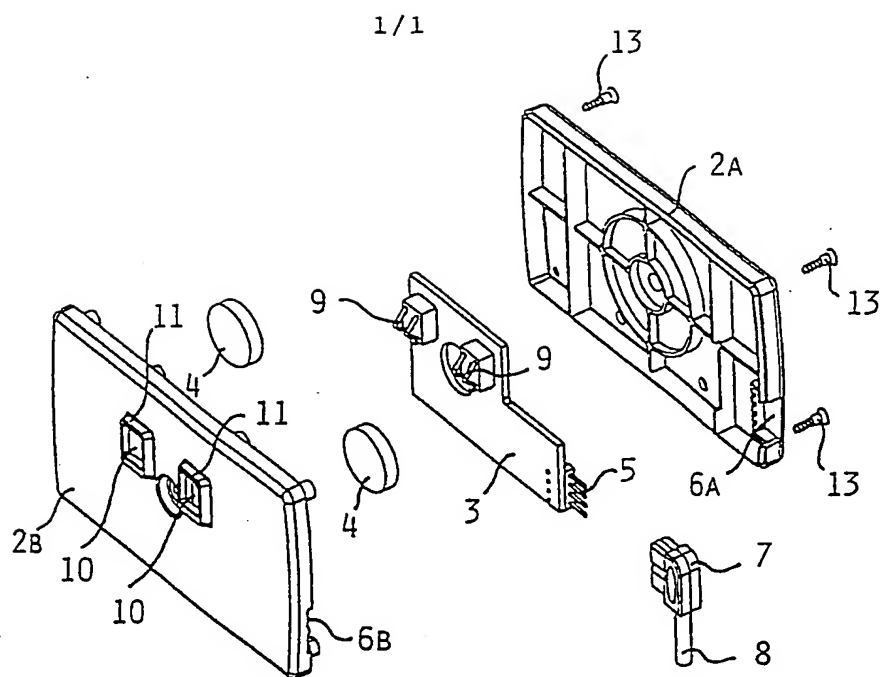


FIG. 1

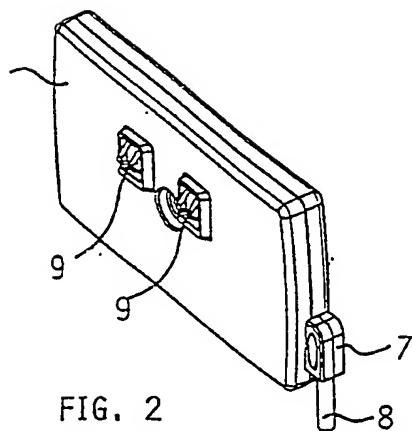


FIG. 2

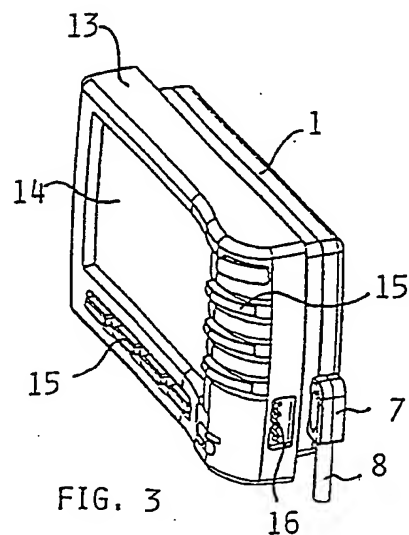


FIG. 3

INTERNATIONAL SEARCH REPORT

PCT/NL 03/00224

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B60R11/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B60R H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 317 707 A (BOSCH GMBH ROBERT) 31 May 1989 (1989-05-31) figures 1,2	1,3-6
Y	abstract	7
A	column 2, line 33 -column 4, line 47 ---	2
Y	US 5 381 684 A (KAWAMURA MASATERU) 17 January 1995 (1995-01-17) figures 3-5 column 4, line 26 -column 5, line 29 ---	7
X	US 5 349 326 A (YAMADA MORITO) 20 September 1994 (1994-09-20) figures 1-3	1,3-6
A	abstract column 2, line 30 -column 4, line 5 ---	2,7
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *8* document member of the same patent family

Date of the actual completion of the international search

10 June 2003

Date of mailing of the international search report

18/06/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel: (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

D'Sylva, C

INTERNATIONAL SEARCH REPORT

PCT/NL 03/00224

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 98 39852 A (BARBIERI GIUSEPPE ;PIVA MASSIMO (IT)) 11 September 1998 (1998-09-11)	1-6,8,9
A	abstract; figure 1 page 4, line 11 -page 6, line 20 -----	2
Y	US 6 076 790 A (RICHTER HERBERT) 20 June 2000 (2000-06-20) abstract; figures column 3, line 29 -column 4, line 7 -----	1-6,8,9
Y	DE 198 41 847 A (LEAD ELECTRONIC CO E) 11 November 1999 (1999-11-11) figures 1-5 abstract column 1, line 39 -column 2, line 46 -----	1-5,8,9
Y	GB 2 285 551 A (LEAD ELECTRONIC CO LTD) 12 July 1995 (1995-07-12) abstract; figures 1,5 -----	1-5,8,9
Y	WO 98 17503 A (MILBOURN ANTHONY JOHN ;TECHNOLOGY PARTNERSHIP (GB)) 30 April 1998 (1998-04-30)	1-6
A	abstract; figures 1,2 page 4, line 20 -page 6, line 15 -----	8,9
Y	US 4 319 097 A (LIAUTAUD JAMES P) 9 March 1982 (1982-03-09) column 2, line 10 -column 3, line 29 -----	1-6
A	DE 41 07 995 A (AEG MOBILE COMMUNICATION) 17 September 1992 (1992-09-17) figure column 1, line 3 -column 2, line 34 -----	1,3-6,8
A	DE 298 02 205 U (HENRYK BURY GMBH DIPL ING) 9 April 1998 (1998-04-09) figures 1,2 page 1, line 5 - line 10 column 3, line 15 -column 4, line 19 -----	1,3-6

INTERNATIONAL SEARCH REPORT

PCT/NL '03/00224

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0317707	A	31-05-1989	DE 3740108 A1 DK 650188 A EP 0317707 A1 FI 884040 A	08-06-1989 27-05-1989 31-05-1989 27-05-1989
US 5381684	A	17-01-1995	JP 5238324 A JP 3297747 B2 JP 5246285 A DE 69304100 D1 DE 69304100 T2 EP 0558331 A1 HK 1007656 A1	17-09-1993 02-07-2002 24-09-1993 26-09-1996 30-01-1997 01-09-1993 16-04-1999
US 5349326	A	20-09-1994	JP 5069778 A	23-03-1993
WO 9839852	A	11-09-1998	IT MI970457 A1 AU 8843098 A WO 9839852 A1	03-09-1998 22-09-1998 11-09-1998
US 6076790	A	20-06-2000	DE 19800174 A1 DE 29823915 U1	08-07-1999 13-01-2000
DE 19841847	A	11-11-1999	DE 29807890 U1 DE 19841847 A1	30-07-1998 11-11-1999
GB 2285551	A	12-07-1995	NONE	
WO 9817503	A	30-04-1998	AU 4714697 A WO 9817503 A1	15-05-1998 30-04-1998
US 4319097	A	09-03-1982	NONE	
DE 4107995	A	17-09-1992	DE 4107995 A1	17-09-1992
DE 29802205	U	09-04-1998	DE 29802205 U1	09-04-1998

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.